




3VR Network Transaction Interface (NTI) Device Datasheet

The NTI Device enables secure and easy integration of ATM transaction data with 3VR SmartRecorders for the most powerful retail banking investigations.

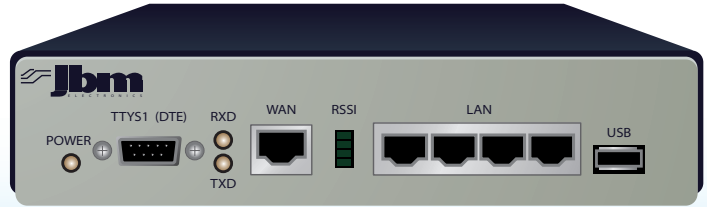

Transaction Integration with 3VR NTI Offers:

Powerful Searching

- Enables quick and powerful investigations by transaction data for video associated with transactions (e.g. search for transaction events with transaction ID 8279380).
- 3VR SmartStorage™ stores high quality transaction events 15 times longer than conventional video solutions, delivering years of searchable transaction images.

With optional plug-in customization, you can:

- Remove secure or unwanted data.
- Use custom search fields to easily perform more targeted searches that allow you to search multiple fields or search by range.
- Customize the appearance of transaction data on the 3VR SmartRecorder.


ATM events from 3VR System

	DF005698 Withdrawl \$30 From Checking 00534 01334 20791
11. ATM 4564-6 9:30:05 am	ATM Transaction
	NC000052 Withdrawl \$40 From Checking 36466 40870 95789
22. ATM 4224-1 4:54:45 pm	ATM Transaction

Effortless and Secure Integration

- Obtain transaction data from your ATM with minimal changes to your bank's IT infrastructure.
- Integrate with widespread ATMs including NCR, Diebold, Wincor and others.

Ethernet Transaction Integration

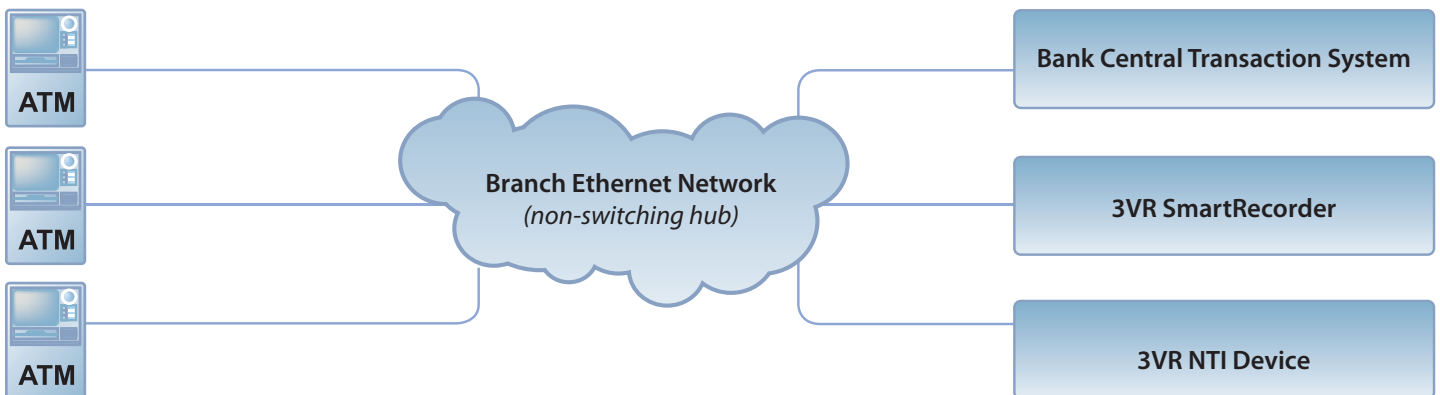

Technical Specifications

Physical Properties

Unit Type	Stand-alone device
Dimensions (H x W x D)	7.88" x 6.25" x 1.63"
Mounting	Unspecified
Unit Weight	2 lbs.
Shipping Weight	2 lbs.

Environmental Requirements

Operating Temperature	32° to 104° F maximum
Heat Dissipation	Unspecified
Humidity	5% to 95% (non-condensing)
Storage Conditions	-40° to +158° F maximum

Electrical Requirements

Power Type	12V (DC External) 120-240 VAC, 50-60 HZ
------------	---

Network Requirements

IP Addresses	Static IPs strongly recommended
--------------	---------------------------------

Compatibility

Communication Protocols¹

NCR DirectConnect+ (NDC+)

Ethernet Interconnect *(preferred connection type)*

Connection type	Five 10/100BaseT (C112)
Interface	Female RJ-45 Connector
Required Equipment	A single NTI unit can be used for all ATMs
Network Requirements	Network capable of Port Mirroring or Network Hub (Not included) Static IPs strongly recommended

Ordering Info

Product Code	Description
A6-NTI	ATM Integration Kit — includes Network Transaction Interface (NTI) Device and ATM Plug-in for Ethernet-based ATMs

Associated Products


PS-SU-PLG	Plug-in customization (optional)
-----------	----------------------------------

Note: Please consult your 3VR account manager or consult your price guides for more information.

¹ 3VR offers a software-based plug-in for Ethernet Diebold ATMs using the 911-912 or XApCom protocols, eliminating the need for the NTI device. Please consult your sales representative for more information, or the 3VR Commercial Price Guide.

NOTE: Configuration of the NTI device is performed using a web browser on a laptop connected to the NTI device using Ethernet connection.

Visit www.3vr.com for up-to-date materials and information about 3VR products.

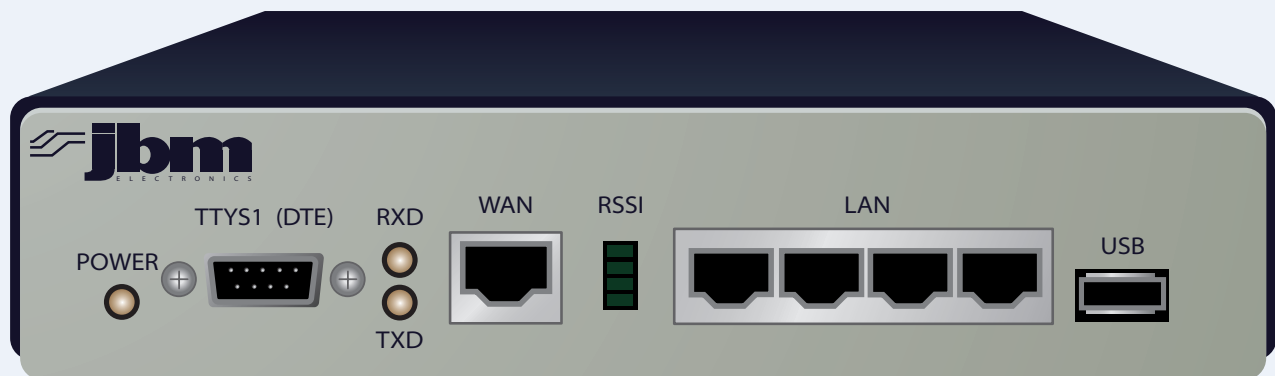

Version: NTIDS0111. Specifications to change without notice.